



The 746, 746F and 747, 747F indoor sounders are attractive, compact and durable. Their clear sound and easy installation make them a *sound decision* for you and your customers.

746/746F – INDOOR SPEAKERS

FEATURES:

- High quality mylar cone
- Heavy duty magnet
- Durable ABS plastic
- Attractive designer case
- Easy to mount on wall (746) or flush mount (746F)
- Mounting hardware included
- Private labeling available

SPECIFICATIONS:

Voice coil impedance - 8 ohm
Voice coil diameter - .79" (20mm)
Cone diameter - 3.43" (87mm)

Power Rating:

15 watts continuous
20 watts peak

Speaker Type:

Mylar cone

Magnet Weight:

2.8 oz (81g)

Dimensions:

746: 4" x 4" x 2"
(102mm x 102mm x 51mm)
746F: 5" x 6.75" x 1.675"
(127mm x 159mm x 42.5mm)

Color:

White

747/747F – SELF CONTAINED SIRENS

FEATURES:

- 95dB output at 12VDC
- 2 tones - steady and warble
- High quality mylar cone
- Heavy duty magnet
- Durable ABS plastic
- Attractive designer case
- Easy to mount on wall (747) or flush mount (747F)
- Hardware included
- Private labeling available

SPECIFICATIONS:

Voice coil impedance - 8 ohm
Voice coil diameter - .79" (20mm)
Cone diameter - 3.43" (87mm)

Speaker Type:

Mylar cone

Input Voltage:

6-15VDC

dB Output:

95dB @ 12VDC @ 10'

Current Draw:

400mA @ 12VDC 8 ohm load

Operating Temp:

0°C to 50°C

Tone Frequency:

Steady - 1200HZ
Warble - 800HZ to 1200HZ, 1 second ramp cycle

Magnet Weight:

2.8 oz (81g)



Dimensions:

747 4" x 4" x 2"
(102mm x 102mm x 51mm)
747F 5" x 6.75" x 1.675"
(127mm x 159mm x 42.5mm)

Color:

White



TYPICAL SPEAKER HOOKUPS:

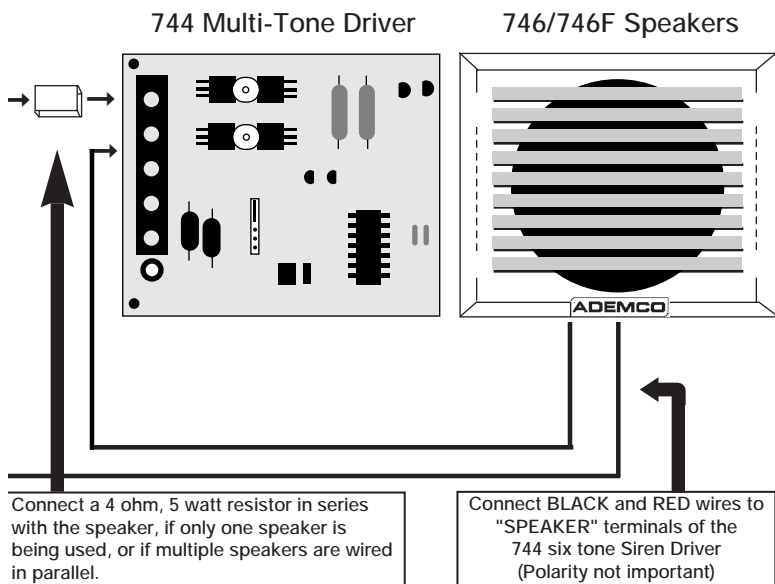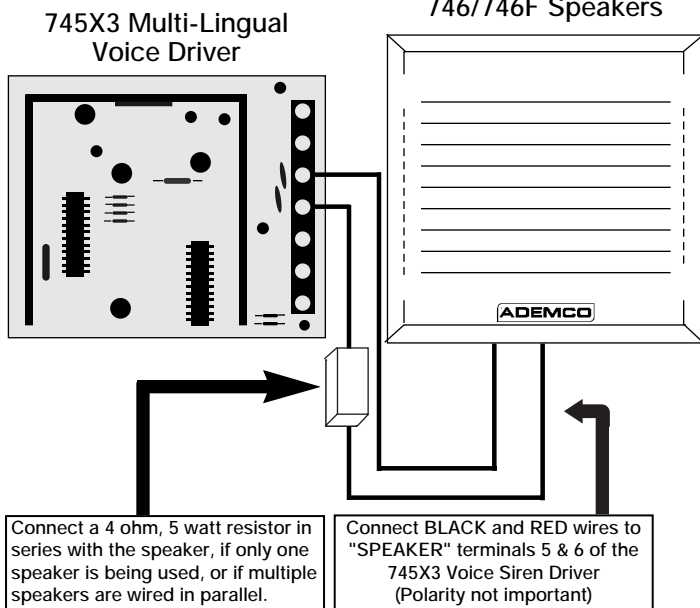

Connect BLACK wire to negative terminal

Connect YELLOW for a STEADY sound, or RED for a WARBLING sound, to the positive of the alarm sounder output terminal.

Do NOT connect both RED and YELLOW wires.

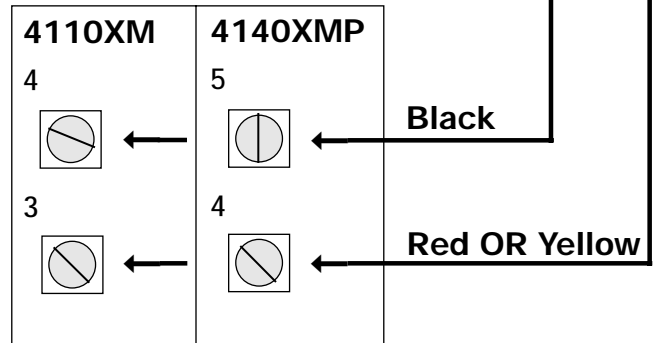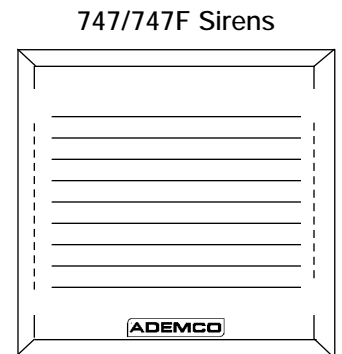

HOW TO ORDER:

- 746: Wall mount 15 watt speaker
- 746F: Flush mount 15 watt speaker
- 747: 2 tone self-contained siren, wall mount
- 747F: 2 tone self-contained siren, flush mount
- 744: 6 tone, 119dB siren driver
- 745: Voice output siren driver
- 745X3: Multi-language voice siren driver

For private label stickers call Ademco Product Management: 516-921-6704 ext. 1147

746/746F PRODUCT ADVISORY:

Some siren drivers deliver more than 20 watts of power, therefore, it is advisable in an installation using only one speaker to include at least a 4 ohm, 5 watt resistor in series with the speaker. Multiple speaker configurations in series do not require this resistor.